

Dimensions (mm)

L	2042
Amax	1615 (5.3 ft)
Amin	90°-500
B	962
H	920-1300**
Axial shifting	600
Transversal shifting	900

A = bar length  
 (\*) With optional device.  
 (\*\*) For greater heights, contact your closest Iemca dealer.

Technical Characteristics

Round bar dimensions	ø Min 5 mm (3/16")	ø Max 80 mm (3")
Hexagonal bar dimensions (socket wrench)	ø Min 5 mm (3/16")	ø Max 65 mm (2 1/4")
Magazine Capacity	~600 mm - 400 kg	
Working axis height	920-1300 mm	
Installed power	1 kW	



KID 80+ can be controlled also through smartphone and tablet



Don't forget to always use original IEMCA spare parts to have maximum performance

05001181\_09/16



# KID 80+



**IEMCA, a BUCCI AUTOMATIONS S.p.A. Division**  
 Via Granarolo 167, 48018 Faenza (RA), ITALY  
 Tel. +39.0546.698000 Fax +39.0546.46338  
 iemca.it@bucci-industries.com www.iemca.com

**BRAZIL**  
 BUCCI INDUSTRIES BRASIL (IGM DO BRASIL LTDA)  
 Avenida dos Pinheiros 465 - 13280-000 Vinhedo - SP (São Paulo)  
 Phone +55 19 3515 7220 iemca.br@bucci-industries.com www.bucci-brasil.com.br

**FRANCE**  
 BUCCI INDUSTRIES FRANCE  
 145 Rue Louis Armand - ZI des Grands Pres - F - 74300 Cluses  
 Phone +33 450 896960 Fax +33 450 896135 iemca.fr@bucci-industries.com www.bucci-industries.fr

**GERMANY**  
 BUCCI INDUSTRIES DEUTSCHLAND GmbH  
 Stammheimer Str. 10 - D-70806 Kornwestheim  
 Phone +49 (0)7154 83 70 700 Fax. +49 (0)7154 83 70 7025 iemca.de@bucci-industries.com www.bucci-industries.com

**JAPAN**  
 IEMCA division of IGM Nippon K.K.  
 6-10-1, Kamoi, Midori-KU - Yokohama-Shi, Kanagawa, JAPAN Zip code 226-0003  
 Phone +81 45 931 5096 Fax +81 45 931 5098 iemca.jp@bucci-industries.com

**PRC**  
 BI-TECH (Suzhou) Co., Ltd.  
 106 Wufang Road, Wujiang Area, Suzhou, PRC 215200  
 Phone +86 512 8155 6988 Fax +86 512 8155 6986 iemca.cn@bucci-industries.com

**TAIWAN**  
 GIMCO Ltd.  
 NO. 297, Dongsing Rd., Dali City, Taichung County, 412, TAIWAN, R.O.C.  
 Tel +886-4-2406-6970 Fax +886-4-2406-6943 iemca.tw@bucci-industries.com www.gimco.com.tw

**USA**  
 BUCCI INDUSTRIES USA Inc.  
 9332 Forsyth Park Drive - Charlotte - NC 28273-9332 - USA  
 Phone 001-704-5838341 Fax 001-704-5838486 iemca.us@bucci-industries.com www.bucci-industries.us



Follow us on



Scan our QR code with your smartphone



www.iemca.com



The **KID 80+** is an automatic high-performance **short bar feeder**, ideal for applications on fixed headstock CNC lathes, even equipped with the sub-spindle. The KID 80+ can handle **short bars** with diameters between **5 to 80 mm**, for bar lengths from **90\*** to **1,615\*\*** mm. It is designed to meet the needs of those ones are looking for accurate machining of **short bars**, adaptability to **frequent work changeovers**, and **small** occupied space. The KID 80+ is **simple** to use, **robust** and featured by the **sub-spindle mode**.



The **KID 80+** Benefits  
is your high performance short bar feeder!

**Simple.** The magazine has been improved from the previous versions and it is now equipped with a "simplified bar loading" kit, which allows simpler and safer loading of heavy bars. The improved operator interface has been enriched with new functionalities which make machine usage easier and more intuitive than before. The quick disconnect bar pusher and the easy-to-access storage of the unused ones inside the bar feeder have been installed to make changeover quicker and easier for the operator.

**Robust.** The steel structure guarantees an elevated stiffness of the bar feeder, which is extremely solid and stable. The magazine has been reinforced and its load capacity has been increased up to 400 kg without neglecting dimensions and space requirements.

**Sub-spindle mode.** The bar feeder can perfectly work with sub-spindle lathes thanks to the completely new sub-spindle software feature. It allows the measurement of the length of the bar introduced into the spindle without physically moving the bar pusher, but by using the interface signals sent by the lathe, thus resulting in shorter non-productive time and higher working speed. The feature is totally integrated in the standard user friendly operator interface.

## Simple



The **simplified bar loading kit** allows simpler and safer loading of heavy bars into the magazine.

**Changeover time** has been reduced to **less than 1 minute** thanks to the quick disconnect bar pusher and the easy access to the storage of the two unused ones inside the bar feeder.



The **new one touch operator interface** can facilitate usage by less experienced operators and also has the ability to **store part programs** (up to 100) and easily recall them when needed by the operator. It is possible to remotely operate the bar feeder from the panel of the lathe\*\*\*.

**Axial and transversal shifting devices** guarantee easy access to the machine for maintenance and adjustments between the lathe and the bar feeder.




## Robust



**Load capacity** has been increased up to **400 kg** thanks to the reinforced magazine.

The robust structure provides **high stability** and **rigidity**.

## Sub-spindle mode

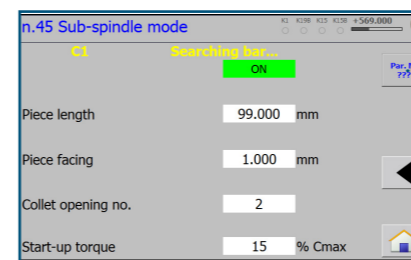

**Sub-spindle software mode** allows higher working speed and shorter non-productive time. Thanks to the measurement of the length of the bar introduced into the spindle, it is able to keep track of the number of finished pieces and to detect when to load a new bar, only requiring the operator to initially insert a few parameters.

(\*) With optional device.

(\*\*) The bar length must never be longer than the spindle length.

(\*\*\*) Only for lathes with Windows operating system and only by request when ordering.

